

# HT60-166M-xxx

(xxx=360-380 in step of 5W)

**NEW**

Big Size: Cell 166\*83

## 360W / 365W


## 370W / 375W / 380W



- Module Efficiency: 19.3%
- No. of Cells: 120 (6 × 20)
- Weight: 20.4kg
- Dimensions: 1775mm×1052mm×35mm

(Optional)  
Design of Water  
Leakage Trough  
Monocrystalline

Established to develop solar technology for Satellite program

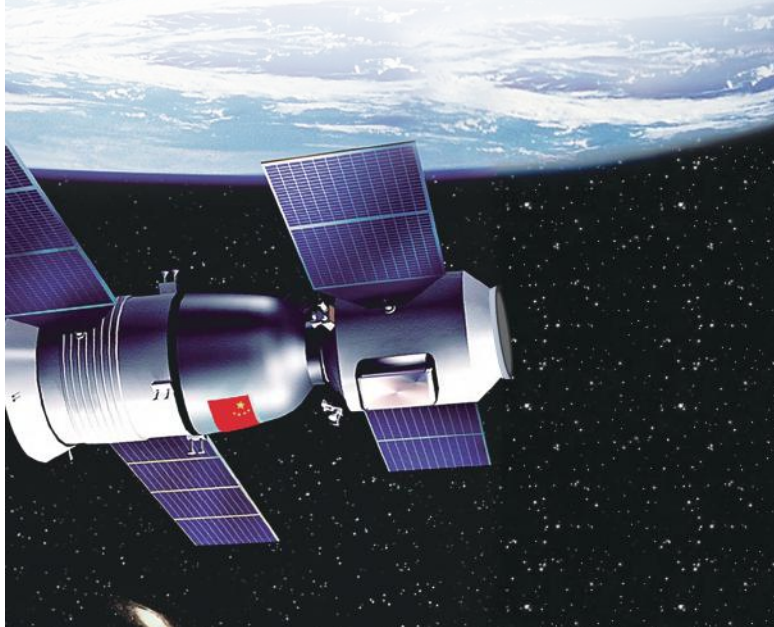

Shanghai Aerospace Automobile Electromechanical Co., Ltd.  
website: www.ht-saae.com.au

Factory:  
Lianyungang ShenZhou New Energy Co., Ltd.



**Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production.**



**9BB The optimized number and width of main gate lines, Maximize the light receiving area of components and Reduce component power consumption**

**15Ys**  
Products Warranty



**Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs**

**25Ys**  
Warranty on power output



**All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.**

**EL**

**Microcrack resistant Double glass structure enhance reliability, triple EL tested of high quality control.**



**Entire module certified to with stand extreme 2400Pa/1.5 Wind 2400Pa/1.5 Snow**

**5W**

**Positive tolerance 0/+5w guaranteed**

**Comprehensive and first-rate certification system**

IEC61215: 2016.IEC61730: 2016 Latest Standard  
ISO9001, ISO14001 and OHSAS18001,  
meeting the highest international standards  
Strict quality control

Warranty partner





**Munich RE**

www.munichre.com/PVWarrantyPartner

# 360W/365W/370W/375W/380W

## Engineering Drawing

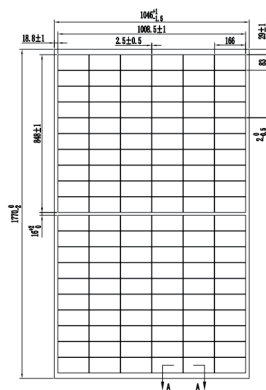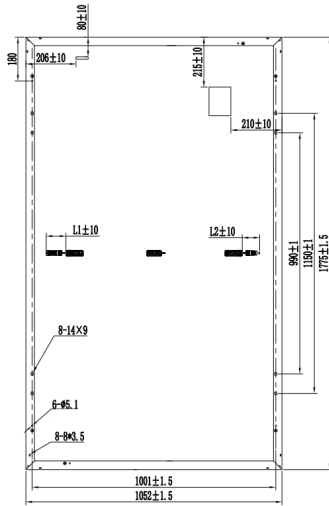

## Electrical Characteristics

Module	HT60-166M-xxx(xxx=360-380 in step of 5W)				
Maximum Power at STC(Pmax)	360W	365W	370W	375W	380W
Open-Circuit Voltage(Voc)	41.1V	41.3V	41.5V	41.6V	41.7V
Short-Circuit Current(Isc)	11.53A	11.63A	11.72A	11.85A	11.98A
Optimum Operating Voltage (Vmp)	33.7V	33.9V	34.1V	34.2V	34.3V
Optimum Operating Current(Imp)	10.69A	10.77A	10.86A	10.98A	11.09A
Module Efficiency	19.3%	19.5%	19.8%	20.1%	20.4%
Tolerance	Pmax±3% Voc±5% Isc±5%				
Maximum System Voltage	1500V DC(IEC)				
Maximum Series Fuse Rating	20A				
Operating Temperature	-40 °C to + 85 °C				
Fire Class	Class C				

## NMOT

Performance at NMOT					
Maximum Power	267W	270W	274W	278W	281W
Open Circuit Voltage (Voc)	38.8V	39.0V	39.2V	39.3V	39.4V
Short Circuit Current (Isc)	9.31A	9.39A	9.46A	9.57A	9.67A
Maximum Power Voltage (Vmp)	31.8V	32.0V	32.2V	32.3V	32.4V
Maximum Circuit Current (Imp)	8.40A	8.44A	8.51A	8.61A	8.67A
NMOT	45°C ±2°C				

\*STC:Irradiance 1000W/m<sup>2</sup>, module temperature 25, AM=1.5  
Optional black frame or white frame module according to customer requirements

\*NMOT: Irradiance 800W/m<sup>2</sup>, ambient temperature 20 °C, wind speed 1 m/s

## Mechanical Characteristics


Solar Cells	Monocrystalline 166 × 83 mm
No.of Cells	120 (6 × 20)
Dimensions	1775mm×1052mm×35mm
Weight	20.4 kg
Front Glass	High transmission tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68
Cable	4mm <sup>2</sup> (IEC)
Connectors	PV-C002
Packaging Configuration	30pcs / box, 780pcs / 40'HQ Container

## Temperature Characteristics

Temperature Coefficient of Pmax	$\gamma$ (Pm)	-0.39%/K
Temperature Coefficient of Voc	$\beta$ (Voc)	-0.29%/K
Temperature Coefficient of Isc	$\alpha$ (Isc)	0.049%/K


## Warranty

15-year product warranty  
25-year warranty on power output  
Specific information is referred to the product quality guarantee



## I-V Curves

Current-Voltage & Power-Voltage Curve

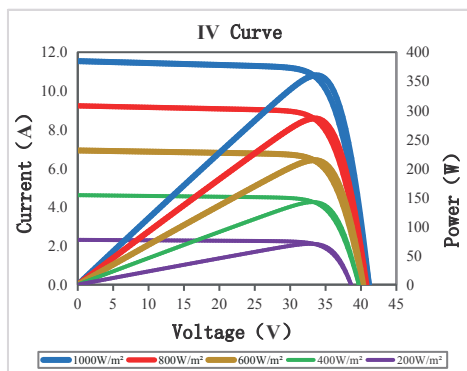

## Information Box